



ROOM-BY-ROOM DESIGN DEVELOPMENT

Five-bay race workshop | executive club lounge | 11-car gallery | vertical core | finished floor systems

DESIGN BASIS

HEADQUARTERS	Approx. 23,000-25,000 GSF
WORKSHOP	5 bays at 22' x 60' + 20' support spine
SHOWROOM - LEVEL 1	Approx. 96' x 72' 7 display cars
SHOWROOM - LEVEL 2	Approx. 96' x 52' 4 display cars + void
VERTICAL MOVEMENT	Passenger elevator + code stair + vehicle lift
LOOK-TO-FLOOR	This package fixes the space planning and finish intent before architectural, structural, MEP, fire-protection, accessibility, and permitting design. It is intentionally detailed enough for pricing discussions, but it is not a stamped construction set.
TARGET CHARACTER	Black metal, warm stone, walnut, crimson light

G-101 WORKSHOP PLAN

Five specialist bays, support rooms, workflow, safety and utility points.

G-102 TYPICAL BAY

Lift geometry, tool zone, reels, lighting, clearance and power.

G-103 GARAGE FLOOR

Resin layout, joints, drainage, slab pads and installation sequence.

S-101 SHOWROOM L1

Seven display positions, reception, circulation and vehicle lift.

S-102 SHOWROOM L2

Four-car gallery, atrium, structural loading and vertical section.

L-201 CLUB LOUNGE

Bar, dining, conversation, simulators, terrace and material zoning.

V-301 STAIR + ELEVATOR

Accessible passenger route, protected stair and core section.

F-501 FINISH SCHEDULE


Finish codes, patterns, transitions and room assignments.

F-502 FLOOR BUILD-UPS

Layer-by-layer systems from subgrade/deck to final surface.

F-503 INSTALL + QA

Sequencing, mockups, tolerances, protection and maintenance.

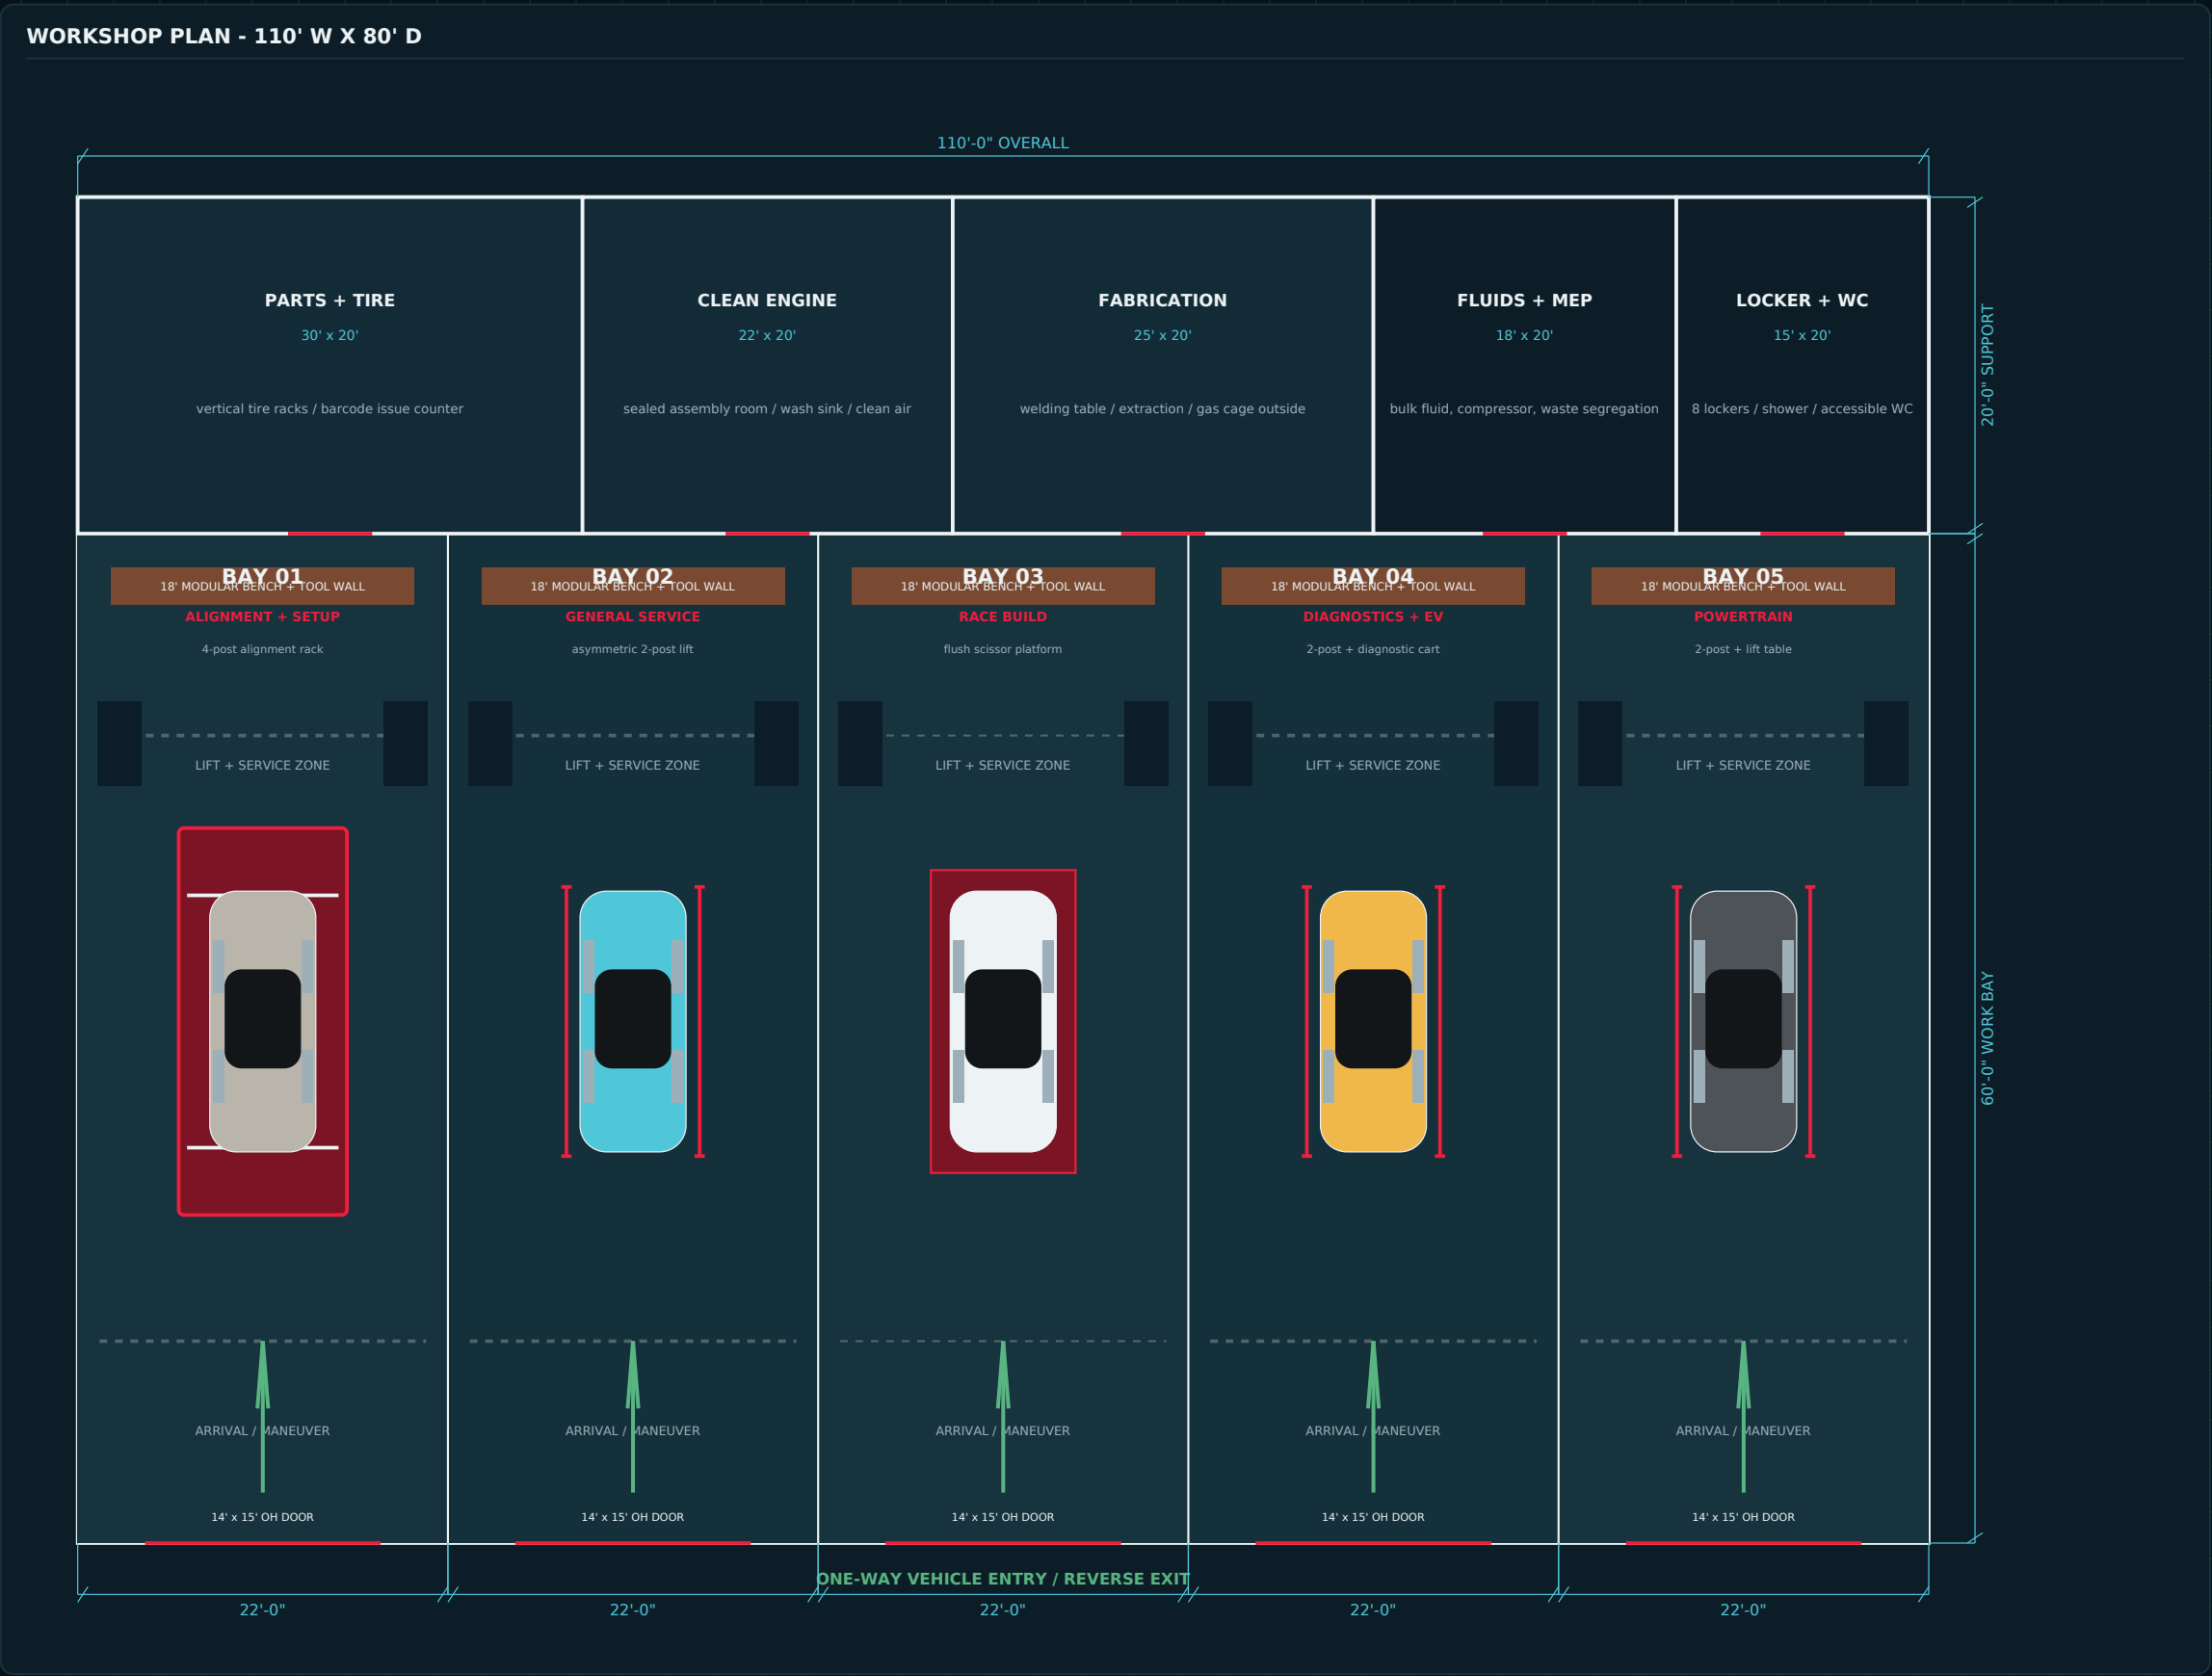

BAY-SPECIFIC EQUIPMENT

- Bay 01: four-post alignment rack, turn plates, slip plates, recessed scale pads and tire-temperature station.
- Bay 02: 10,000-12,000 lb asymmetric two-post lift, brake lathe cart and mobile fluid drain.
- Bay 03: flush scissor lift, modular build table, corner-weight scales and clean parts carts.
- Bay 04: two-post lift, insulated EV tools, 208/240V disconnect, diagnostic workstation and battery support.
- Bay 05: two-post lift, 3,000 lb powertrain table, engine crane parking and heavy component shelving.

SHARED BUILDING SYSTEMS


- 80-100 footcandles at working plane; CRI 90+, 4000K linear LED.
- 120V quad power every 8 ft; dedicated 208/240V circuits at each lift.
- Dry compressed-air loop with ceiling reels; isolate compressor acoustically.
- CO/NO2 monitoring, demand exhaust, source capture for running engines.
- Wet-pipe fire suppression, monitored alarm, spill kits and flammable cabinet.

CRITICAL COORDINATION


Lift anchors, slab thickness, under-slab utilities, trench drains, door tracks, sprinklers and overhead reels must be coordinated before the slab pour. No post-tensioned slab is assumed in the workshop.



ENLARGED BAY PLAN - 22' X 60'

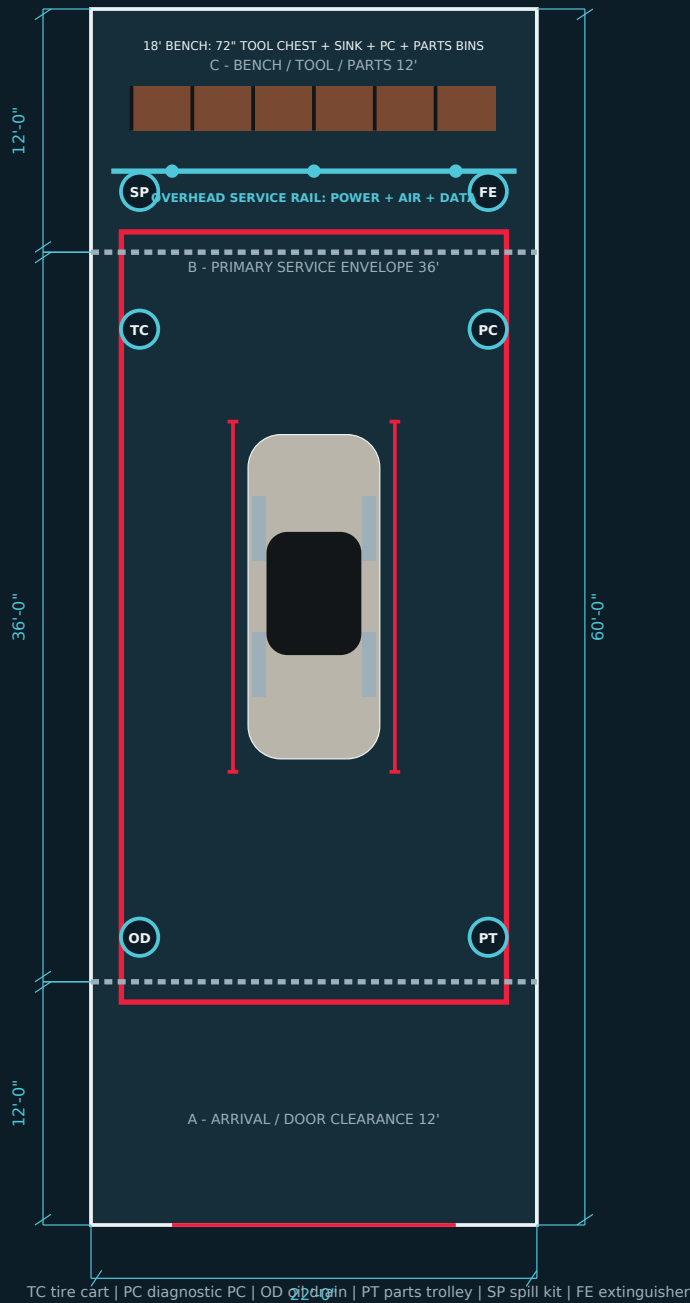


REFLECTED OVERHEAD SERVICES

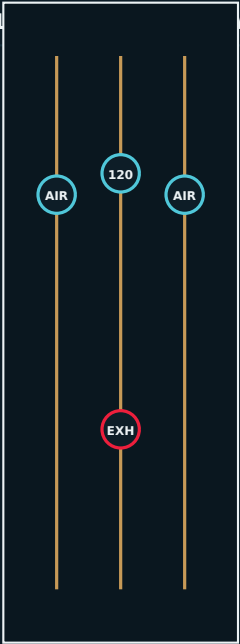

OVERHEAD DESIGN CRITERIA

- Three continuous LED rows, 4000K, CRI 90+, dimmable; add vertical wall-wash light at both sides of vehicle.
- Retractable power and air reels centered outside door and over rear service zone; cords never cross the lift path.
- Hose-reel exhaust source capture plus CO/NO2 sensors; demand-control ventilation interlocked to alarm.
- Sprinkler and detector layout maintains lift clearance at full rise; verify obstruction rules with fire engineer.
- Clear underside target: 17'-6". Door tracks, lights, reels and ducts stay outside the lift operating envelope.


LONGITUDINAL BAY ELEVATION + CLEARANCE

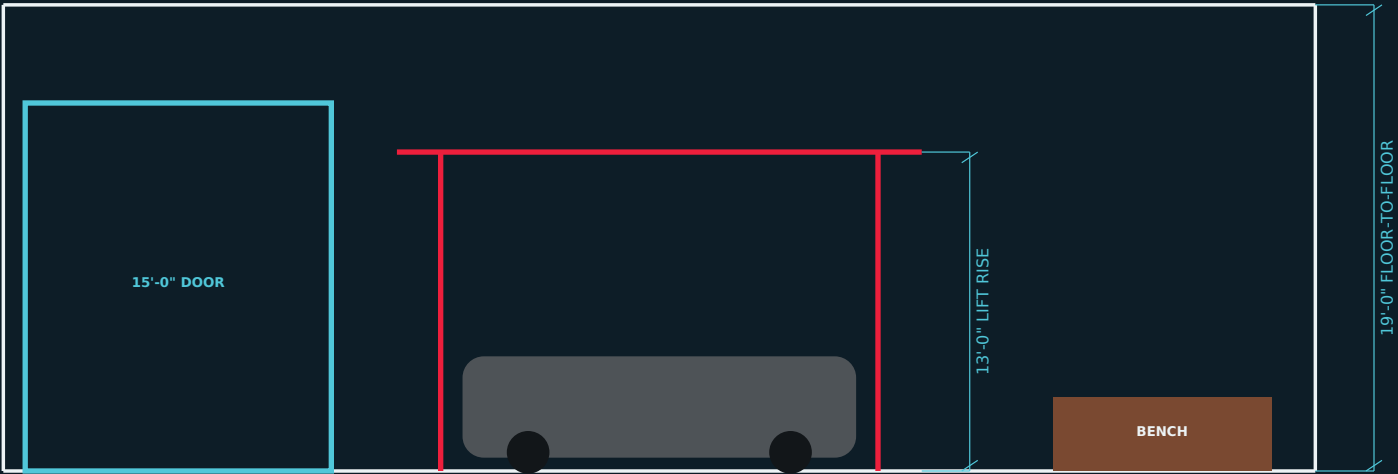

STRUCTURAL LIFT PAD: 12" MIN CONCEPT THICKNESS; FINAL BY LIFT MFR + STRUCTURAL ENGINEER



GARAGE FLOOR FINISH + JOINT PLAN

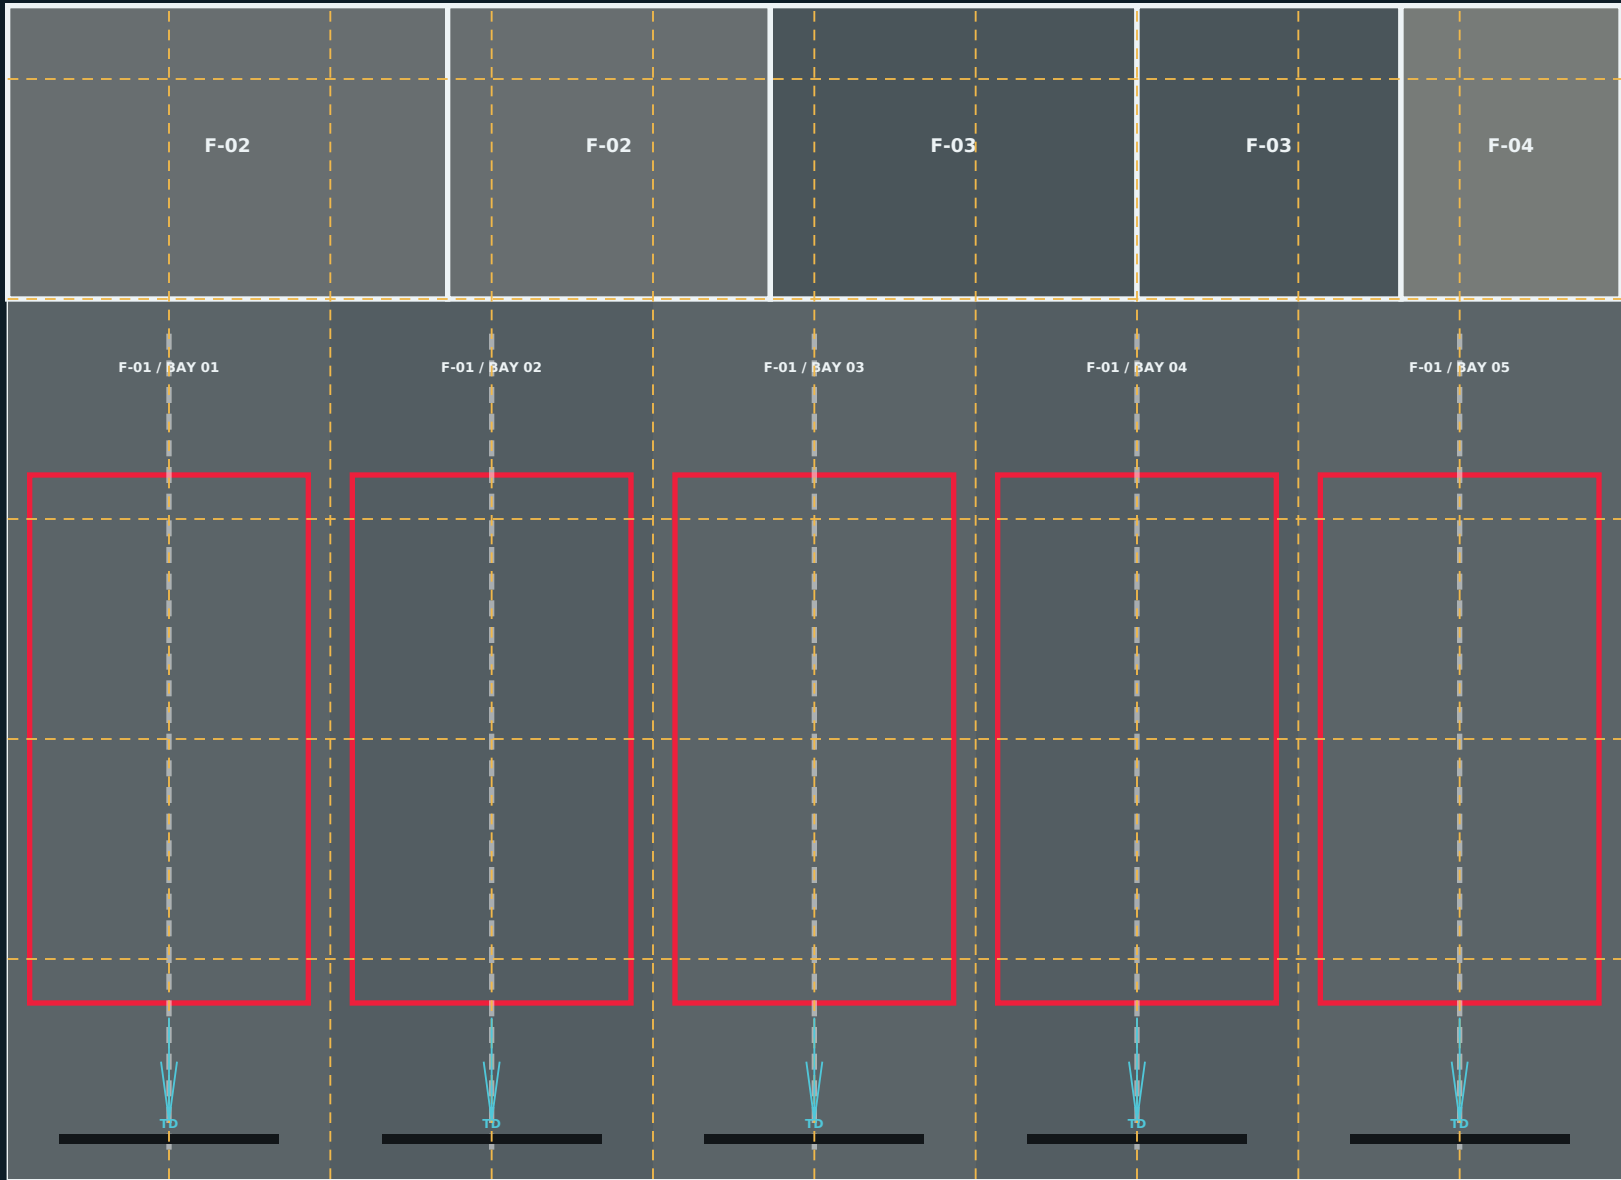

YELLOW DASH = SLAB CONTROL JOINT; HONOR THROUGH RESIN WITH FLEXIBLE SEALANT

OPTIONAL 1/16" PER FT LOCAL SLOPE TO INTERCEPTOR TRENCH; FINAL DISCHARGE BY CIVIL / PLUMBING CODE

F-01 HIGH-PERFORMANCE WORKSHOP FLOOR - BUILD-UP

- CLEAR WEAR COAT**
15-20 mil aliphatic polyaspartic; satin, UV stable, hot-tire resistant
- COLOR / BROADCAST**
60-80 mil 100% solids epoxy with fine aluminum-oxide aggregate
- PRIMER**
penetrating moisture-tolerant epoxy primer; broadcast to refusal as specified
- SURFACE PROFILE**
shot-blast or diamond grind to ICRI CSP 3-4; remove all laitance
- STRUCTURAL SLAB**
8" 5,000 psi reinforced slab; 12" thickened pads at lift anchors
- VAPOR BARRIER**
15 mil minimum ASTM E1745 Class A, taped laps and sealed penetrations
- BASE + SUBGRADE**
8" compacted crushed aggregate over proof-rolled prepared subgrade

FINISH CODES + USE


F-01	medium-gray broadcast epoxy/polyaspartic	all five service bays
F-02	light-gray chemical-resistant resin	parts + clean engine
F-03	urethane-cement, integral cove base	fabrication + fluid/MEP
F-04	24 x 24 slip-resistant porcelain tile	locker / WC

INSTALLATION HOLD POINTS

Do not coat until concrete is cured, moisture testing passes the selected resin manufacturer's limits, temperature/dew point are controlled, lift anchors are installed or precisely sleeved, and the approved 8 x 8 ft color/texture mockup is signed off. Route every structural joint through the finished floor.



LEVEL 1 DISPLAY HALL - 96' X 72' / 7 CARS

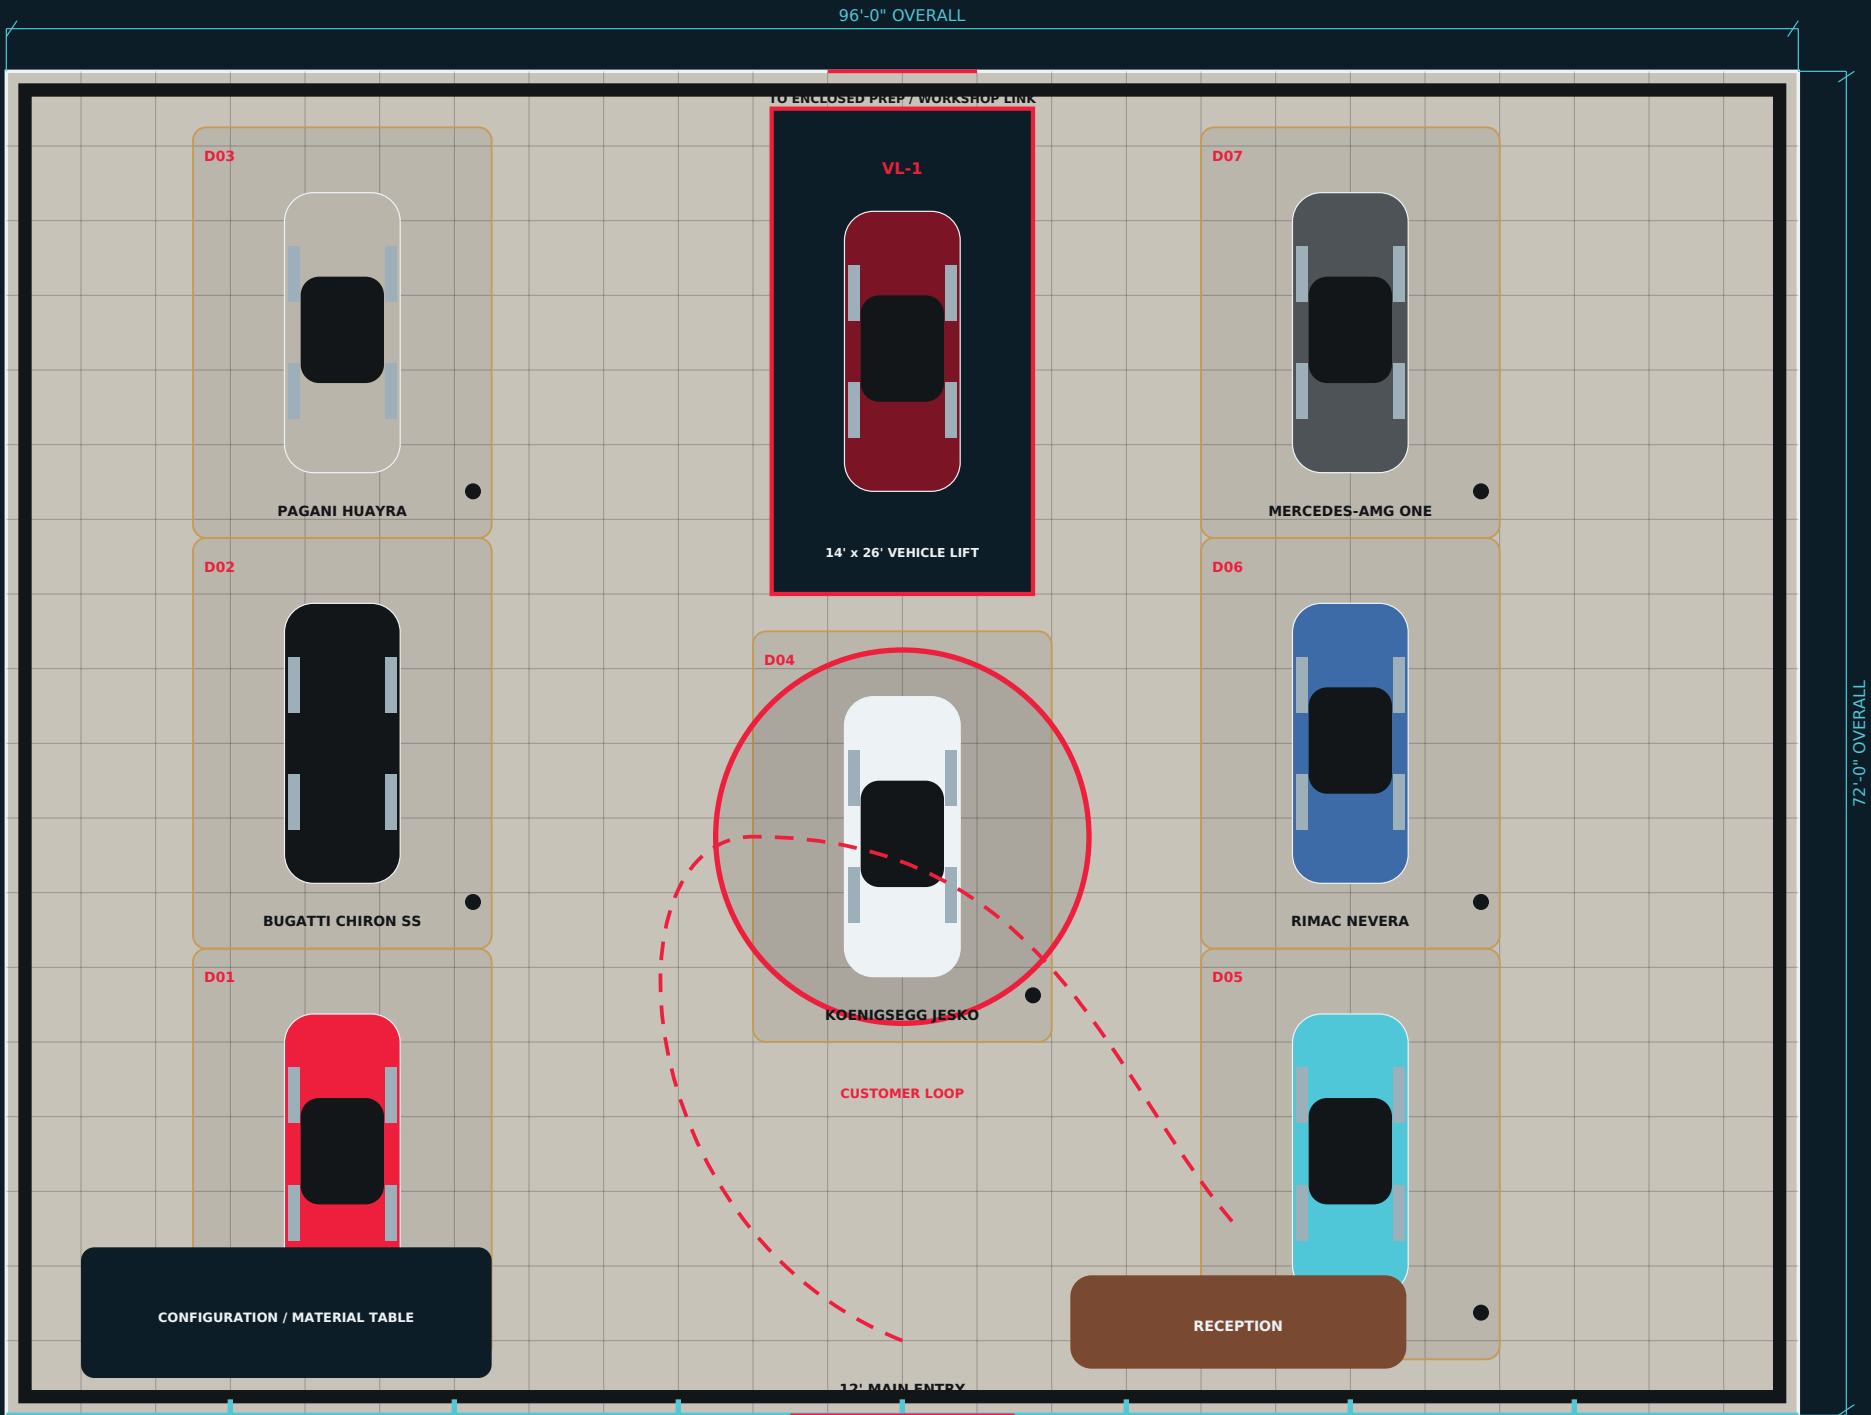

SPACE + CLEARANCE RULES

- Display pod: nominal 16 x 22 ft with a 6 ft minimum clear visitor route around primary viewing sides.
- Centerpiece: 20 ft diameter low-profile turntable, flush with finish floor and removable for service.
- Vehicle lift: 14 x 26 ft clear platform concept; interlocked glazed doors at both levels.
- No ramps in the public hall. Prep connection is level to protect low splitters and carbon undertrays.
- Floor boxes at every pod provide 120V, data and battery-maintainer power; covers flush and load-rated.

LIGHTING + DISPLAY


- 3000K ambient, CRI 95+ adjustable track heads; 3500K wall wash at branding.
- 60-80 fc on vehicles, 25-35 fc circulation; scenes for event, cleaning and photography.
- Low-iron laminated glass; concealed shade pockets to control glare and solar heat gain.
- Black micro-perforated acoustic ceiling rafts between lighting tracks.

FLOOR FINISH F-05

48 x 48 in rectified through-body porcelain, warm light gray, matte/satin R9-R10. Use full-coverage deformable mortar, epoxy grout and movement joints aligned with the 12 ft curtain-wall grid. Black sintered-stone perimeter band; 1/2 in black stainless reveals at feature pod.




LEVEL 2 GALLERY PLAN - 96' X 52'

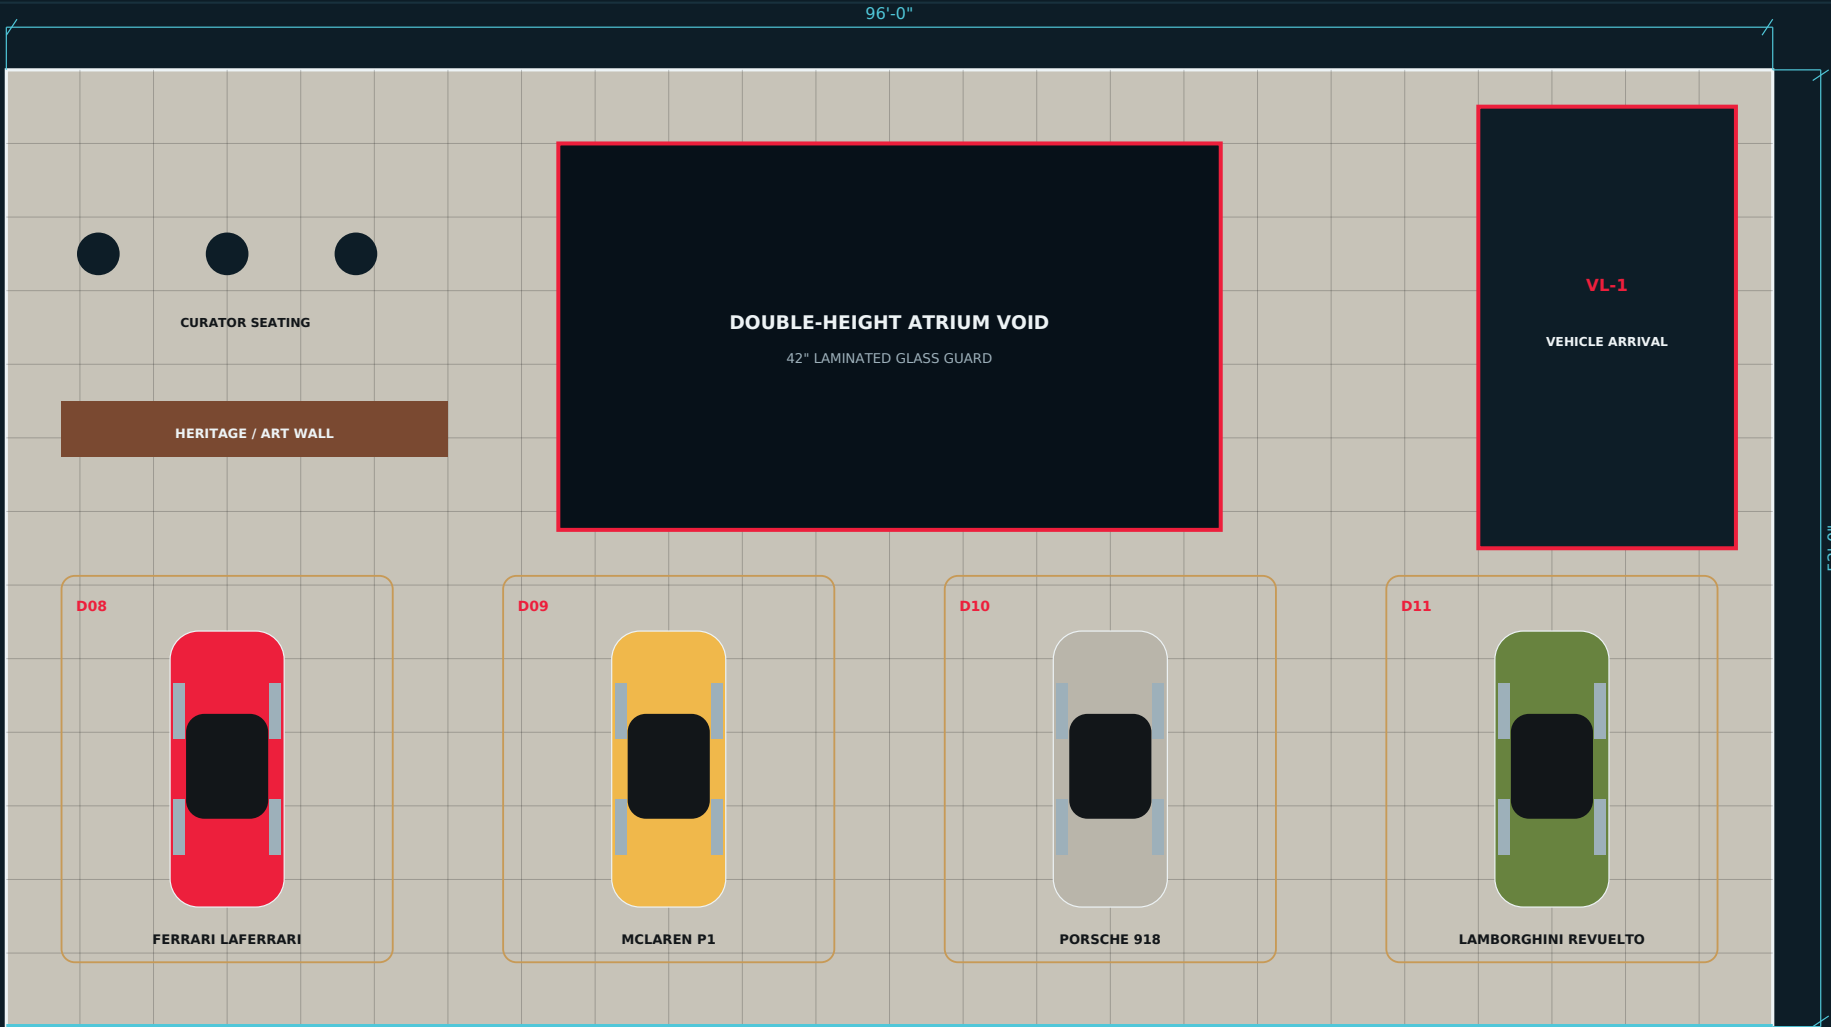

UPPER GALLERY DESIGN CRITERIA


- The four display pads sit directly behind the front curtain wall, matching the exterior image and keeping every car visible from the arrival court.
- Concept structural basis: composite steel frame designed for vehicle-gallery loading, including wheel point loads, lift reactions and vibration control. Final loads by structural engineer.
- Vehicle lift receives its own foundation/steel support, smoke/fire protection strategy, drainage and interlocked landing doors.
- A 6 ft minimum clear route remains behind display cars. The glazed atrium guard keeps views to the ground-floor centerpiece.
- Passenger elevator and protected stair are outside this display rectangle but connect directly to the gallery lobby; a remote second exit is retained at the opposite end.
- F-06 floor finish matches F-05 visually but uses a lighter assembly over the composite deck; all movement joints are carried through the tile.

SHOWROOM LONGITUDINAL SECTION - PUBLIC GLASS / ATRIUM / TWO VEHICLE LEVELS

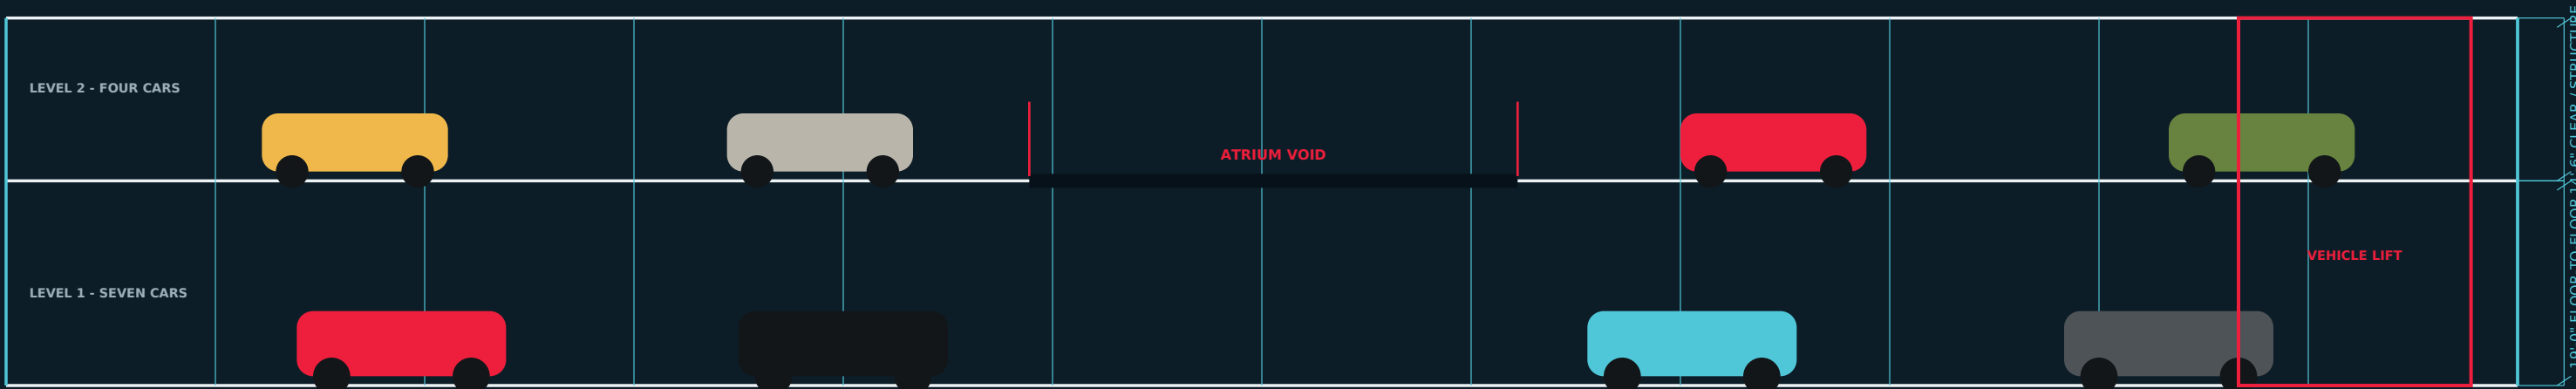



EXECUTIVE CLUB LOUNGE - 110' X 32' + TERRACE

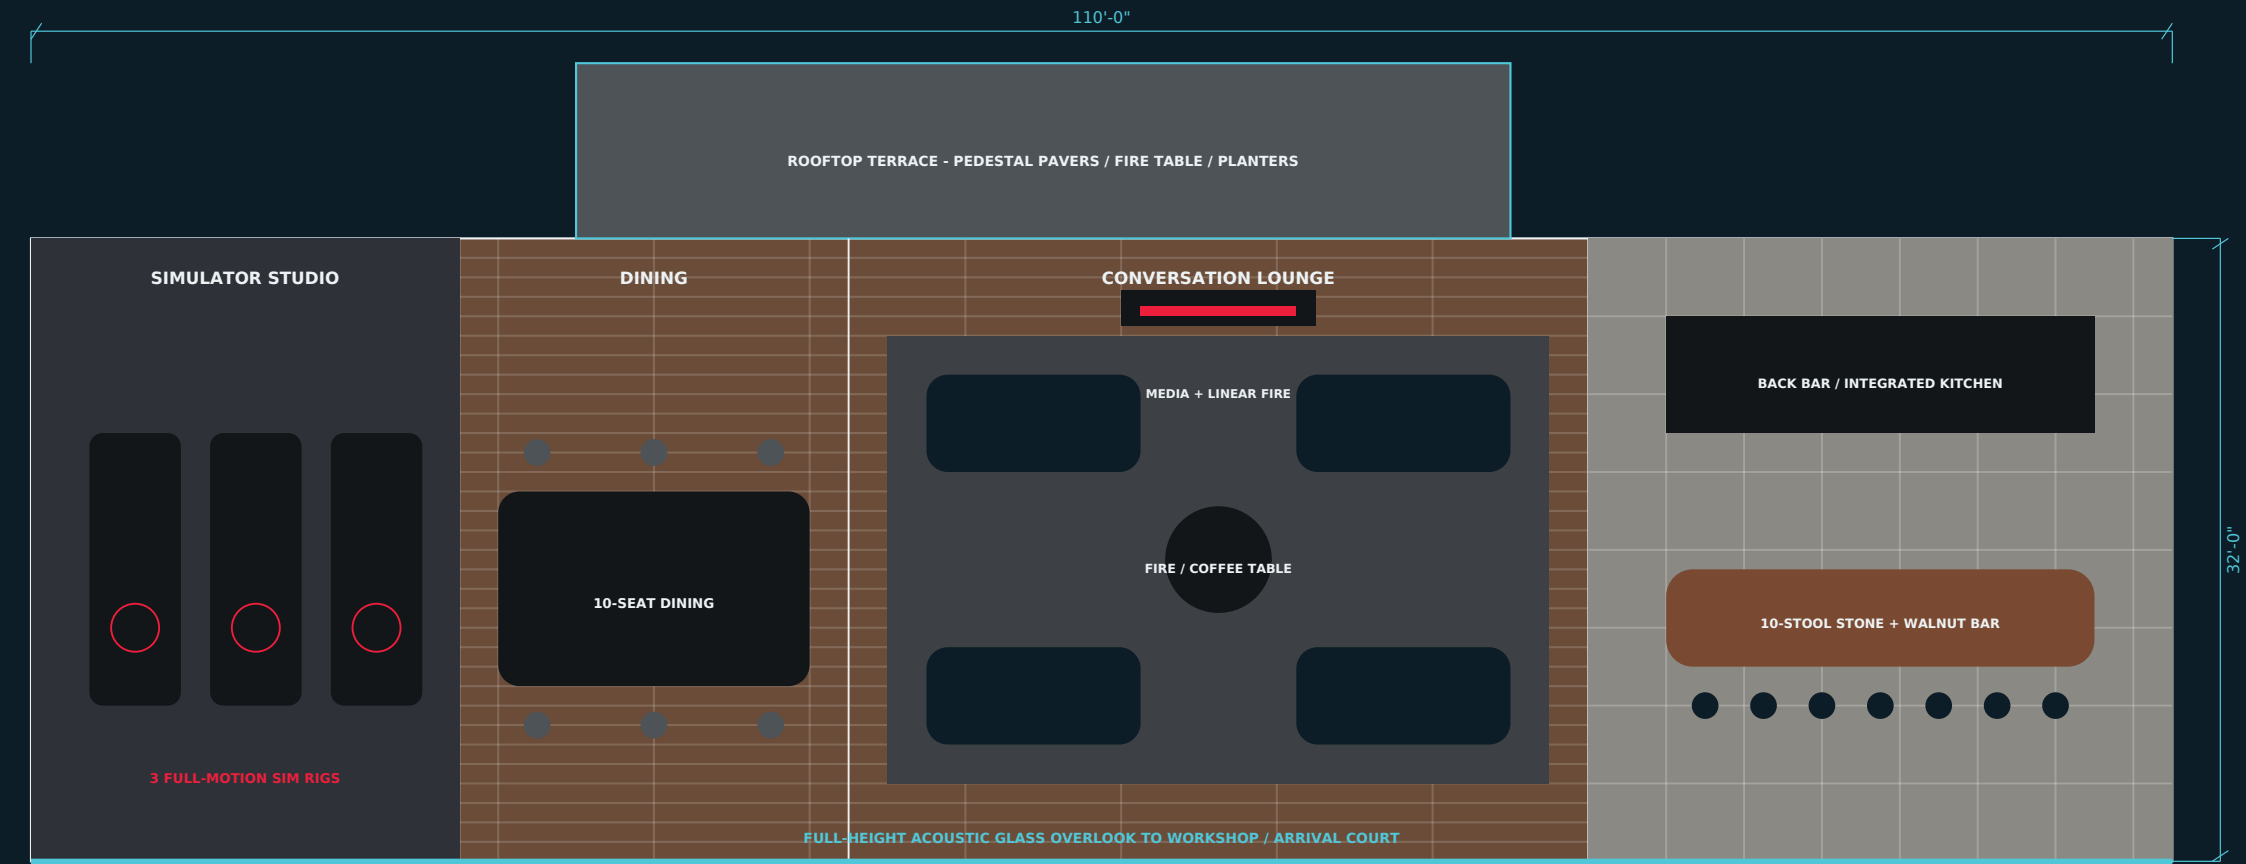

WHAT THE LOUNGE CONTAINS

- 10-seat hospitality bar with sink, ice maker, dishwasher drawers, undercounter refrigeration and locked spirits storage.
- 10-seat dining table; service credenza with power for catered events.
- Four-sofa conversation group around a low linear fire / coffee-table feature.
- 98 in media wall, concealed speakers and event presentation connectivity.
- Three full-motion racing simulators with isolated power, data and acoustic treatment.
- Outdoor terrace with porcelain pavers, wind-screen glass, planters and gas fire table.

HOSPITALITY SUPPORT

- Hidden catering pantry and coat closet at core connection.
- Dedicated restroom access without crossing private offices.
- AV rack and network switch in ventilated locked closet.
- Motorized shades, scene controls and occupancy/daylight sensors.

CAPACITY / CLEAR ROUTES



Plan for approximately 50 seated/standing occupants in normal club use. Maintain at least 44 in clear circulation, 60 in wheelchair turning at key nodes, and an accessible route to terrace, bar seating, elevator and restrooms. Final occupant load and egress by code consultant.

FLOOR ZONING

F-07: 8 in wide engineered European white oak, smoked natural finish, running parallel to the glass. F-08: 24 x 48 in warm-gray porcelain at bar/kitchen. F-09: solution-dyed acoustic carpet tile in simulator room. Loose wool rug at conversation zone.

LIGHTING + ACOUSTICS

2700K decorative pendants at bar and dining; 3000K recessed/linear ambient; 3500K display light. Wood-slat acoustic ceiling over black felt in lounge, high-NRC ceiling in simulator room, acoustic laminated glass at workshop overlook, and separate HVAC zones for odor/noise control.

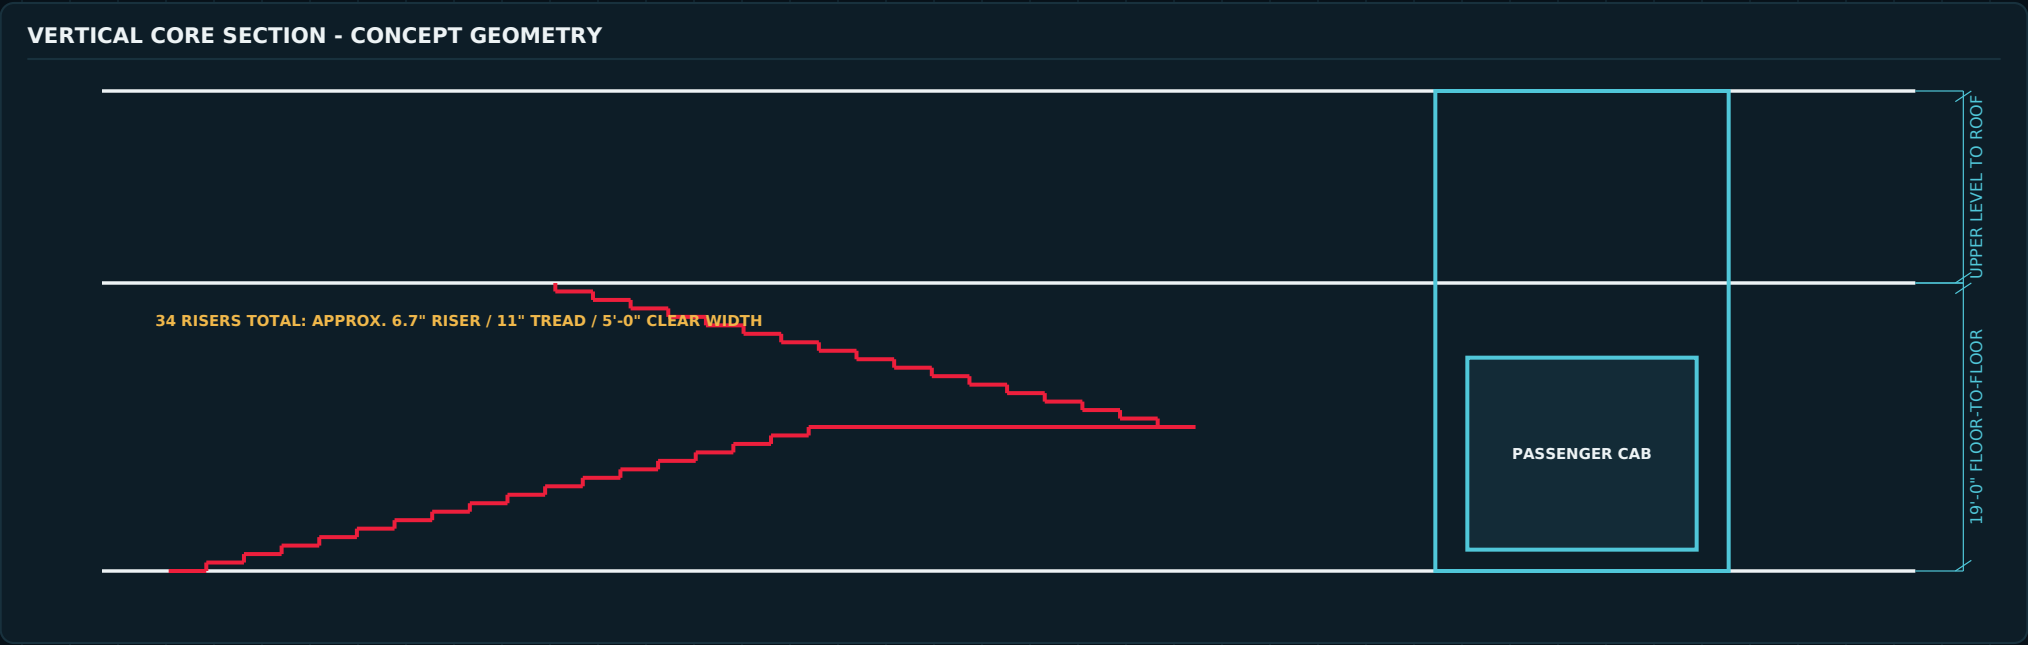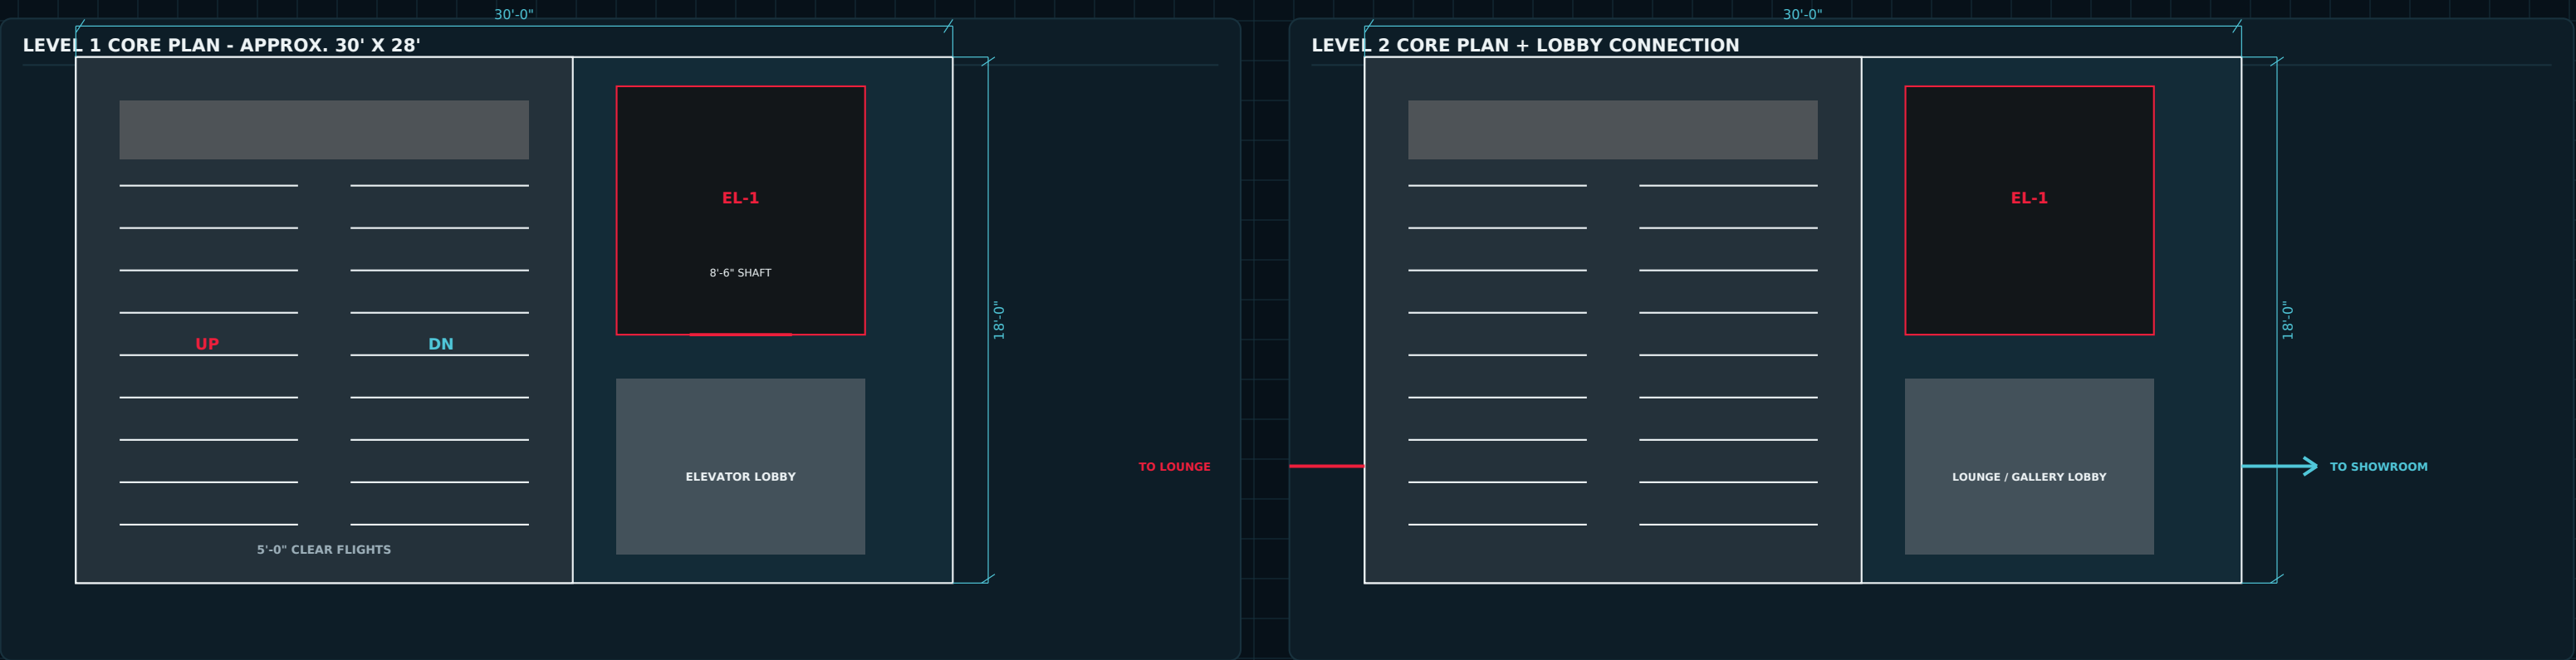

CORE FINISHES



Stair: blackened structural-steel stringers with dark flame-finished granite or commercial porcelain treads, 2 in contrasting anti-slip nosing, black steel guard and warm-oak inner handrail. Lobby: F-05 showroom porcelain at lower level; F-07 oak or F-06 porcelain at upper connection. Elevator cab: black stainless, walnut rear panel, stone-look porcelain floor and diffuse linear ceiling.

LIFE-SAFETY INTENT

Passenger elevator is an accessible route, not an exit. Main stair is enclosed to the rating required by final code analysis. Provide a remote second exit from the upper level. Door swings, areas of refuge, elevator recall, pressurization and fire-service features remain jurisdiction-specific.



MASTER FLOOR FINISH SCHEDULE

CODE	SWATCH	FINISH	PRIMARY ROOMS	SYSTEM	COLOR / PERFORMANCE
F-01		WORKSHOP RESIN	Bays 01-05	100% solids epoxy broadcast + polyaspartic topcoat	Medium gray / satin / red safety border
F-02		CLEAN RESIN	Parts + clean engine	Chemical-resistant high-build epoxy	Light gray / integral 6 in cove
F-03		URETHANE CEMENT	Fabrication + fluids/MEP	1/4 in troweled urethane cement	Charcoal / slip resistant / coved
F-04		SERVICE PORCELAIN	Locker + WC	24 x 24 in porcelain + epoxy grout	Warm gray / R10-R11
F-05		SHOWROOM L1	Seven-car lower gallery	48 x 48 in through-body porcelain	Warm light gray / matte-satin
F-06		SHOWROOM L2	Four-car upper gallery	48 x 48 in porcelain over uncoupling layer	Match F-05; movement joints
F-07		ENGINEERED OAK	Lounge + dining	8 in engineered European white oak	Smoked natural / matte / wire-brushed
F-08		HOSPITALITY TILE	Bar + catering pantry	24 x 48 in commercial porcelain	Warm graphite / R10
F-09		ACOUSTIC CARPET	Simulator studio	Solution-dyed carpet tile + acoustic cushion	Graphite / red accent tile
F-10		STAIR STONE	Stair treads + landings	Flame-finished granite or rated porcelain	Charcoal / contrasting nosing
F-11		TERRACE PAVER	Roof terrace	24 x 48 in 2 cm porcelain on pedestals	Dark stone / exterior slip rating
F-12		ENTRY MAT	Vestibule / public entries	Recessed aluminum-frame walk-off system	Black rib insert / flush frame

LAYOUT DIRECTIONS

- Workshop: center all bay markings on door/lift axes. Red 4 in safety border remains 18 in outside the lift envelope.
- Showroom: establish tile datum at the center feature car and curtain-wall module; avoid sliver cuts at glass and display pods.
- Lounge: run oak boards parallel to the full-height glass to lengthen the space; center transitions below closed doors.
- Bar tile: align joints to millwork and island ends. Simulator carpet tile rotates quarter-turn for subtle texture.
- Terrace pavers align to façade mullions and interior tile joints where possible.

TRANSITION DETAILS


- Resin-to-porcelain: recessed black stainless divider, flush both sides, directly over slab joint where present.
- Porcelain-to-oak: 3/8 in black metal T-profile; set finished surfaces flush and maintain wood expansion gap.
- Oak-to-carpet: concealed flush transition below acoustic door; no surface reducer in accessible route.
- Interior-to-terrace: thermally broken threshold, continuous waterproofing turn-up and slot drain outside glazing.
- All door thresholds: 1/4 in vertical max or code-compliant bevel; protect low vehicle routes from raised strips.

BASE / EDGE SCHEDULE

B-01	6 in integral resin cove	garage support / fabrication
B-02	6 in black rubber base	simulator / service rooms
B-03	4 in walnut veneer shadow base	lounge / dining
B-04	4 in black sintered-stone base	showroom opaque walls
B-05	tile cove or tiled base	WC / wet hospitality areas
E-01	1/2 in black stainless reveal	showroom feature pod




A / GARAGE BAY F-01



- 15-20 mil polyaspartic wear coat
- 60-80 mil epoxy broadcast body coat
- moisture-tolerant epoxy primer
- 8 in reinforced 5,000 psi concrete slab
- 15 mil Class A vapor barrier; taped/sealed
- 8 in compacted crushed aggregate
- proof-rolled prepared subgrade

INSTALL NOTE: Thicken slab to concept 12 in at lift pads. Shot-blast to CSP 3-4. Honor construction and control joints through resin.


B / SHOWROOM LEVEL 1 F-05



- 48 x 48 in through-body porcelain + epoxy grout
- high-performance deformable mortar; full coverage
- crack-isolation / uncoupling membrane
- 6-8 in reinforced structural slab; engineer final
- 15 mil Class A vapor barrier; taped/sealed
- 6-8 in compacted crushed aggregate
- prepared subgrade

INSTALL NOTE: Specify complete mortar contact with no hollow spots under vehicle paths. Place movement joints at structural joints and maximum field size per tile standard.


C / SHOWROOM LEVEL 2 F-06



- 48 x 48 in porcelain + epoxy grout
- deformable mortar; full-bed support
- uncoupling / crack-isolation membrane
- 2-1/2 to 3 in reinforced topping slab
- composite metal deck
- structural steel beam / vibration design
- fireproofing + ceiling/service zone below

INSTALL NOTE: Design framing for vehicle display, wheel point loads, transport path and lift reactions. Isolate vibration and coordinate deck penetrations before pour.


D / LOUNGE WOOD F-07



- 5/8 in engineered white-oak plank
- low-VOC adhesive or approved floating system
- 3-6 mm acoustic isolation mat
- gypsum underlayment / leveling layer
- composite metal deck
- structural steel + acoustic ceiling cavity

INSTALL NOTE: Acclimate wood and verify interior humidity. Run boards parallel to glass. Provide perimeter expansion and flush metal transitions.


E / BAR + WC TILE F-08 / F-04



- commercial porcelain + epoxy grout
- deformable thinset mortar
- bonded waterproofing in wet zones
- sloped mortar bed / gypsum underlayment
- composite metal deck or slab
- structure / ceiling cavity

INSTALL NOTE: Use R10 minimum at bar and R11-equivalent in wet restroom/shower zones. Turn waterproofing up walls and seal every penetration.

F / STAIR TREAD F-10



- 3/4 in stone/porcelain tread and riser finish
- contrasting anti-slip nosing insert
- high-performance setting mortar
- concrete-filled metal stair pan
- welded stair pan / steel stringer support

INSTALL NOTE: Keep nosing consistent and highly visible. Provide continuous handrails, slip-resistant landings and replaceable edge inserts.



FROM STRUCTURE TO FINISHED FLOOR - CONTROLLED SEQUENCE



ACCEPTANCE CHECKLIST

- Approved sample, color, sheen and texture match installed work under final lighting.
- Garage resin: continuous pinhole-free film, uniform aggregate, clean cove and sealed joints.
- Showroom tile: full mortar coverage, no hollow-sounding traffic tiles, controlled lippage and straight modules.
- Wood: moisture content documented; no open joints, edge damage or hollow spots.
- Drainage: water test confirms positive local flow with no ponding at accessible routes.
- Transitions are flush, firmly anchored, deburred and safe for low-clearance vehicles.
- Installer provides care manuals, warranty, batch/lot records and labeled attic stock.

ATTIC STOCK

Hold 3% resin materials by batch (within shelf life), 5% tile/pavers, 3% wood and 5% carpet tile. Store labeled, dry and conditioned on site.

OPERATIONS + MAINTENANCE MATRIX

AREA	DAILY / EVENT	WEEKLY / MONTHLY	ANNUAL / PERIODIC	AVOID
GARAGE RESIN	Dust mop / auto-scrub neutral cleaner; remove oil immediately.	Inspect joints, cove and high-turn areas.	Recoat wear layer as gloss/slip changes; repair impact chips.	Solvent puddles, metal blades, aggressive citrus cleaner.
SHOWROOM TILE	Microfiber dust mop; neutral scrub; dry before vehicle moves.	Clean epoxy grout; inspect metal reveals and floor boxes.	Replace cracked/hollow units; reseal movement joints.	Turning stationary tires, unprotected jacks, acidic cleaner.
LOUNGE OAK	Soft vacuum; damp microfiber; felt pads under furniture.	Check humidity and spills at bar transition.	Renew maintenance oil/finish per manufacturer; repair boards.	Steam mops, wet cleaning, uncontrolled winter humidity.
CARPET / RUG	Vacuum and spot-clean event spills immediately.	Low-moisture extraction and inspect sim-rig anchors.	Deep clean and rotate/replace high-wear tiles.	Over-wetting, harsh solvents, dragging simulator frames.
TERRACE / STAIR	Remove water/debris; inspect slip condition.	Clean drains, pedestal joints and nosings.	Reset pavers, renew sealants, replace nosing inserts.	Deicer not approved for stone/metal, pressure-wash damage.



DESIGN DECISIONS NOW FIXED

- Five 22 x 60 ft drive-in workshop bays with distinct technical roles and a 20 ft support spine.
- Ground showroom sized for seven comfortable display positions, not seven storage stalls.
- Upper gallery holds four cars directly behind the front glass, matching the approved exterior direction.
- Vehicle lift is independent from the accessible passenger elevator and protected stair core.
- Executive lounge includes bar/kitchen, dining, conversation seating, three simulators and terrace.
- Material language: charcoal resin, warm porcelain, smoked oak, black stainless, walnut and crimson reveals.
- Floor systems, joint intent, transition logic and installation hold points are defined for early pricing.

INPUTS REQUIRED BEFORE DESIGN DEVELOPMENT

- Site survey, property setbacks, grading, utility locations, stormwater requirements and vehicle approach geometry.
- City/state building code, fire code, accessibility rules, energy code and zoning/parking requirements.
- Exact lift models, vehicle lift manufacturer, alignment rack, largest/heaviest vehicles and service workflow.
- Mechanical strategy, climate design data, fuel/flammable-liquid policy, exhaust source-capture and EV charging scope.
- Showroom event occupancy, food-service level, liquor-service requirements and hours of operation.
- Target construction budget, procurement method, schedule, material alternates and desired maintenance staffing.
- Licensed architect and engineers for structural, civil, MEP, fire protection, lighting, AV/security and landscape.

RECOMMENDED NEXT DRAWING PACKAGE

01

SITE + ARRIVAL

survey-based site plan, parking, transporter route, exterior display court and stormwater

02

FULL FLOOR PLANS

coordinated walls, doors, offices, restrooms, support spaces and remote egress

03

BUILDING SECTIONS

steel grid, floor heights, roof drainage, envelope thickness and curtain-wall interfaces

04

MEP / FIRE

equipment rooms, ventilation, power distribution, lighting controls, sprinklers and alarms

05

PRICING SET

outline specifications, finish samples, equipment allowances and quantity takeoff

AERO SAINT MOTORSPORT - SCHEMATIC ROOM PACKAGE COMPLETE

Proceed to site-specific architectural design only after owner approval of this program and equipment basis.